




Curved

Soft undulating shapes, curves, dramatic bulkheads - all design possibilities with Luxalon® Curved ceilings from Hunter Douglas. Explore your creativity and break boundaries - inside the curve.

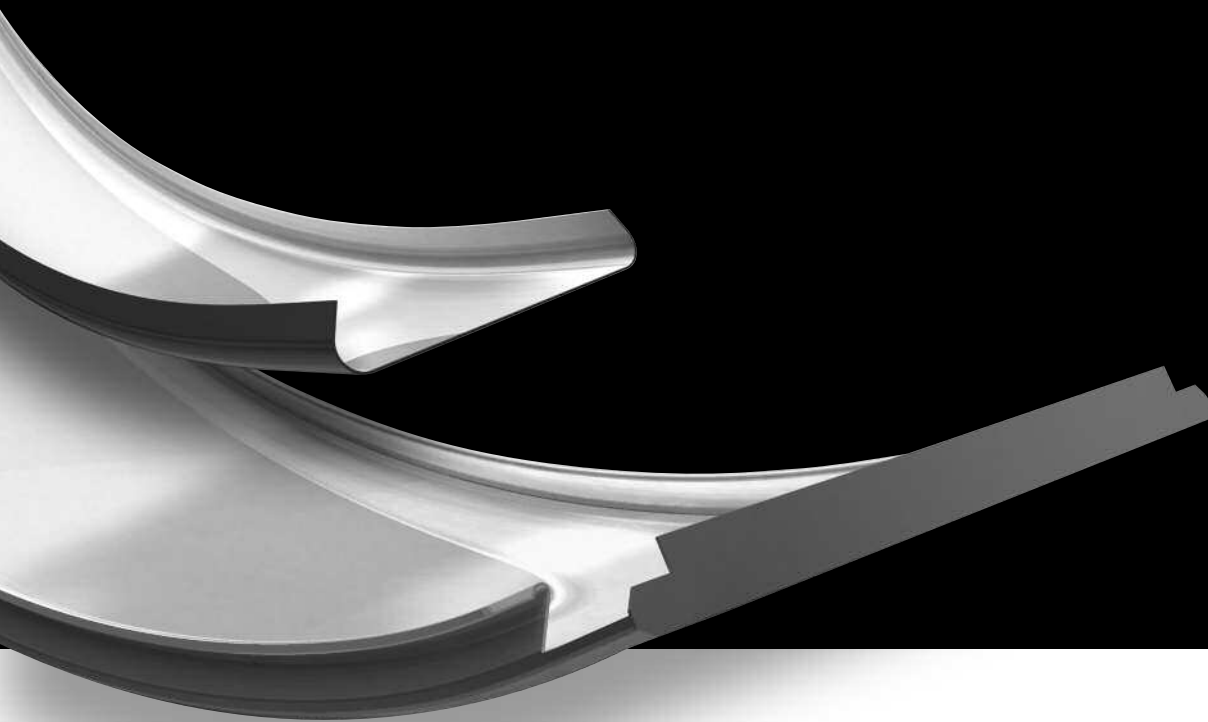

HunterDouglas

CEILING



Curved

Soft, Skyward Sculpture

FLEXIBLE BY DESIGN

Luxalon® Curved ceilings from Hunter Douglas add a twist to the traditional. Imagine concave, convex, and undulating forms that tempt a look upwards.

Create soft curves and sculpted shapes with Luxalon® Curved ceilings. 300C (300 mm wide) and 84R (84 mm wide) panels can curve up to 90 degrees, perfect for opening up public spaces. The Luxalon® curved carrier system helps to transform standard flat panels into dynamic ceiling designs.

The curve doesn't need to stop at the ceiling. Luxalon® Curved ceilings can partially - or completely - clad surrounding walls. Over 40 colours and finishes will ensure you create the perfect look for your project.

LONG LASTING, LOW MAINTENANCE

Luxalon® Curved ceilings are manufactured from roll-formed aluminium coil. Finished with a polyester paint, these ceilings are durable and low maintenance. The coating is stove enamelled in a continuous coil coating process, which ensures uniform coating thickness and absolute adhesion.

For exterior applications, please request aluminium panels with our exclusive Luxacote® finish.

ALL-ACCESS PLENUM

Most Luxalon® ceiling panels allow full plenum access, and can be easily demounted by hand.



Left : Metro Valencia, Estacion Santa Rosa
 Location : Valencia, Venezuela
 Product : Curved ceiling 300C

Luxalon® Curved ceilings give you freedom in design. Our ceiling systems are versatile, and create a variety of visual effects including unique radial and diagonal patterns and flowing curves.

PERFECTLY PERFORATED ACOUSTICS

Improve the acoustics in a space with ceiling panel perforations Ø1, 1.5 or 2 mm. Luxalon® perforated panels come with a special sound-absorbing non-woven tissue glued into the panel, further enhancing acoustical performance.

PROVEN FIRE PROTECTION

All Luxalon® metal suspended ceilings are fully tested for reaction to fire in official fire tests at Efectis, Rijswijk - an independent Dutch fire research institute. The ceilings are classified A2, s1, d0 according to EN 13501-1, and will therefore not contribute to possible fires. For more information visit www.hunterdouglascontract.com

CONTENT	Page
300C Curved	2
84R Curved	6
Curved carrier	9
Material	Specifications 10

Innovative Products Make Innovative Projects



Production by
 Hunter Douglas
 Ceiling Center



HunterDouglas


300C Curved

PANELS


The 300 mm wide panels (1) are made to measure and curved with a maximum standard length (L) of 6000 mm. Easy to fix, to the standard 300C carrier (2), one side of the panel is hung on the prongs of the carrier and then the other side is pressed in with an upward movement.

The panel carrier, which is black, and made of 1.0 mm thick galvanised steel or 0.95 mm thick aluminium, is provided with prongs that accommodate the panels. Integrated locking clips on the carrier can lock the panels, where required.

Carriers have a standard length of 5000 mm and are connected by the carrier splice (3). Panels are connected in length by applying a panel end connector (4) on cross sections of four panels (or two panels at the edge), still allowing easy demounting. A nonius hanger (5) and fixing pieces (6) are provided for suspension. Trimming curved and straight edges is possible - see our various edge trimming options for more information.

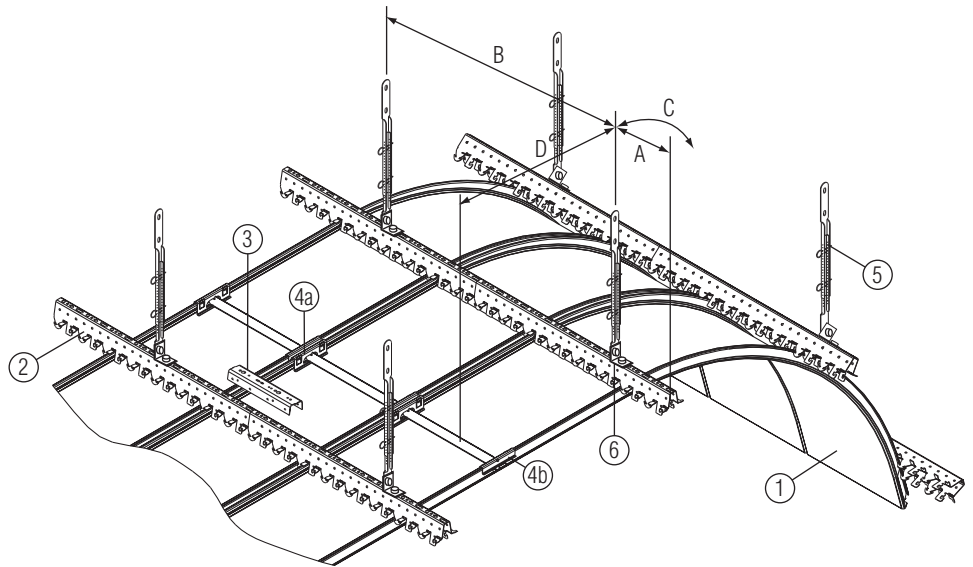

- 1 = curved 300C panel
- 2 = carrier
- 3 = carrier splice
- 4a = panel end connector
- 4b = panel end connector (cut in half)
- 5 = nonius hanger
- 6 = fixing piece (non HD)

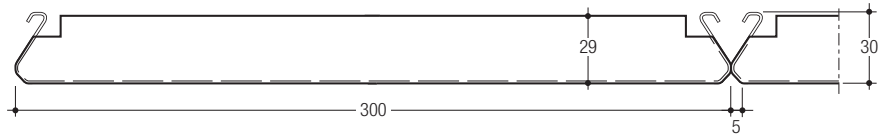

MAXIMUM SPANS

* Depending on the radius: min. span for radius is 1000 mm, max. span for radius > 50 meters.

Panel type	Carrier Span				Panel Span	
	Steel 1.0		Alu 0.95		C	D
Alu 0.7	A	B*	A	B*	750	400
Steel 0.6	300	1500-2000	300	1000-1450	750	400
	300	1100-1600	N.A.	N.A.	750	400

DIMENSIONS & WEIGHTS

Panels from 250-1000 mm and > 6000 mm are available on request.

* Min. weight for flat panels; max. weight for radius 1000 mm

Panel	Width	Min. length	Max. length	Weight/m ² *
Alu 0.7	300	1000	6000	2.9 - 4.5 kg
Steel 0.6				6.7 - 10.4 kg

MATERIAL REQUIREMENT PER M²

The requirement depends on the execution of the curve and ceiling. For a flat ceiling the material requirement would be:

* Depending on panel length from 1 to 6 meter.



** Depending on radius and carrier type.

	Unit	300C Curved Panel system
Panels	lm	3.33
Carriers	lm	1.33
Carrier splices	pcs	0.27
Panel end connectors	pcs	0.55 - 3.33*
Nonius hangers	pcs	0.65 - 1.33**

300C Curved

AVAILABLE CURVED PANEL TYPES

Minimum radius (R) for convex curves approx.
1000 mm, for concave curves approx.
1100 mm.



Type of Curve	Concave	Convex
Continuous curve		
Curve + straight end(s) C + D		

APPEARANCE


* Curved panels feature straight ends of min.
200 mm. Multiple panel curved ceilings with
an approx. radius of 5000 mm or less not
advisable.

I: Multiple panel curved ceilings:

*



II: Single panel curved ceilings:

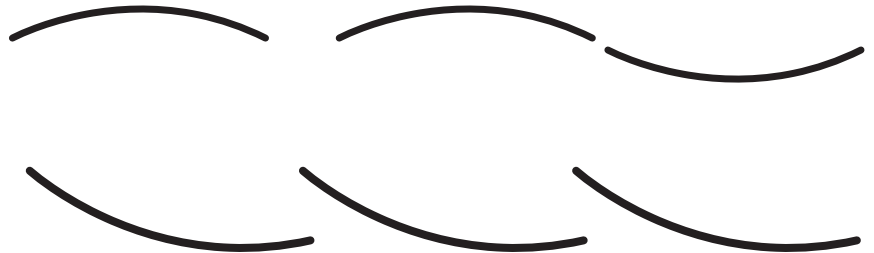


VALUES

Legend	Min/Max Values
L = Length of straight panel	Lmin = 1 mtr (std)
	Lmax = 6 mtr (std)
C/D = Length of straight ends	C/Dmin = 200 mm
R = Radius	Rmin convex = 1000 mm
	Rmin concave = 1100 mm
α = Angle (alpha degrees)	α max = 90°


300C Curved

STANDARD CONSTRUCTION DETAILS

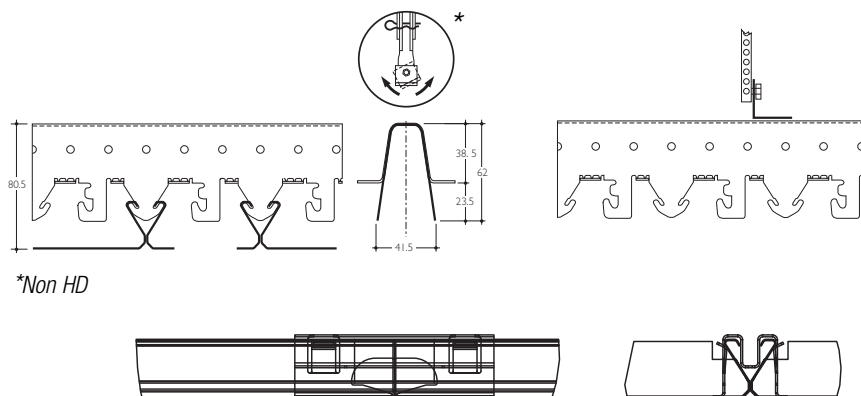

EDGE TRIMMING OPTIONS

Note: all edge materials non-Luxalon®

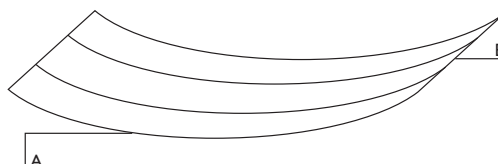

Edge Solutions	Curved edges	Straight edges
Wall-to-wall	<p>(A1)</p> <p>(A2)</p>	<p>(B1)</p> <p>(B2)</p>
Floating Floating (max. gap 1/2 M)	<p>(A3)</p> <p>= max. 150 mm (1/2 M)</p>	<p>(B3)</p>
Floating/Island	<p>(A4)</p>	<p>(B4)</p>

PLENUM ACCESSIBILITY

The 300C Carrier System allows for easy panel demounting. Each panel is fixed to the carrier, which allows each to be removed individually. Use a special shoe-horn shaped tool to remove the panels (available on request).

Apply panel end connectors at cross sections between four panels (or at edges of two panels) to keep the panels aligned.


Acoustics 300C Curved

ACOUSTIC PERFORMANCE


To improve acoustic performance, the Luxalon® 300C Wide Panel Ceilings can be perforated with a Ø of 1.5 or 2.0 mm (open area of 15% and 23%). A sound-absorbing non-woven tissue comes standard with perforated panels for enhanced acoustical performance. To further increase acoustic absorption, consider the ceiling radius: an increase in material surface quantity can result in up to 55% enhancement of absorption surface.

PERFORATION OPTIONS

300C Carrier panels are available in 2 standard perforation patterns:




Ø 1.5 mm
23% open area
Δ 3 mm




Ø 2.0 mm
15% open area
Δ 5 mm

300C



Note: Panels have a nominal plain border of 8.5 mm along the longitude in order to assure maximum flatness and product stability.

SOUND ABSORPTION DATA 300C (straight 300C panel)

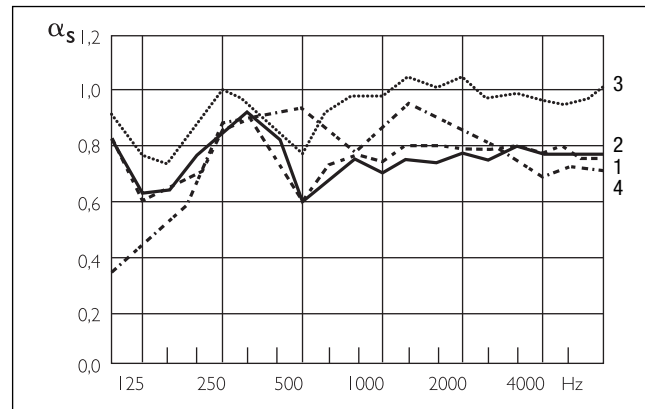

300C

α_s = sound absorption degree:
an absorption of 1.0 indicates a 100% absorption of sound.

- Curve 1 α_s 300C

Ø 2.0 mm perforated panels, provided with 0.2 mm thick, black non-woven acoustic tissue glued over the whole perforated area. Plenum depth is 400 mm.

- Curve 2 α_s 300C

Ø 1.5 mm perforated panels, provided with 0.2 mm thick, black non-woven acoustic tissue glued over the whole perforated area. Plenum depth is 400 mm.

- Curve 3 α_s 300C

Ø 1.5 mm perforated panels, provided with 0.2 mm thick, black non-woven acoustic tissue glued over the whole perforated area plus 25 mm thick mineral wool pad with a density of 16 kg/m³. Plenum depth is 400 mm.

- Curve 4 α_s 300C

Ø 2.0 mm perforated 300C panels, provided 25 mm thick mineral wool pad with a density of 22 kg/m³ wrapped in polyethylene foil. Plenum depth is 400 mm.

Freq. Hz.	125	250	500	1000	2000	4000	α_w
Curve 1	0.61	0.85	0.59	0.75	0.78	0.76	0.75(L)
Curve 2	0.62	0.82	0.60	0.70	0.78	0.77	0.75(L)
Curve 3	0.76	0.99	0.75	0.97	1.05	0.95	-
Curve 4	0.42	0.85	0.93	0.83	0.84	0.69	-

*The 300C Wide Panel ceilings were tested by TNO Delft (The Netherlands), an independent official testing institute. Report no.: TPD-HAG-RPT-94-0037
300L panel due to shape similar performance as 300C panel.*


84R Curved

PANELS

The 84R ceiling system consists of round-edged panels (1) which can be easily clipped on a carrier (2). The panels can be joined with the panel splice or by clipping the panels over each other. Curved 84R ceilings can be created by using a flexible carrier or curving the panels (1).

SUSPENSION

The panel carrier (2) is provided with prongs to accommodate the panels in a standard module of 100 mm. All carriers have a standard length of 5000 mm, and are connected by the carrier splice (5). A nonius hanger (3) and fixing pieces (4) are provided for suspension.

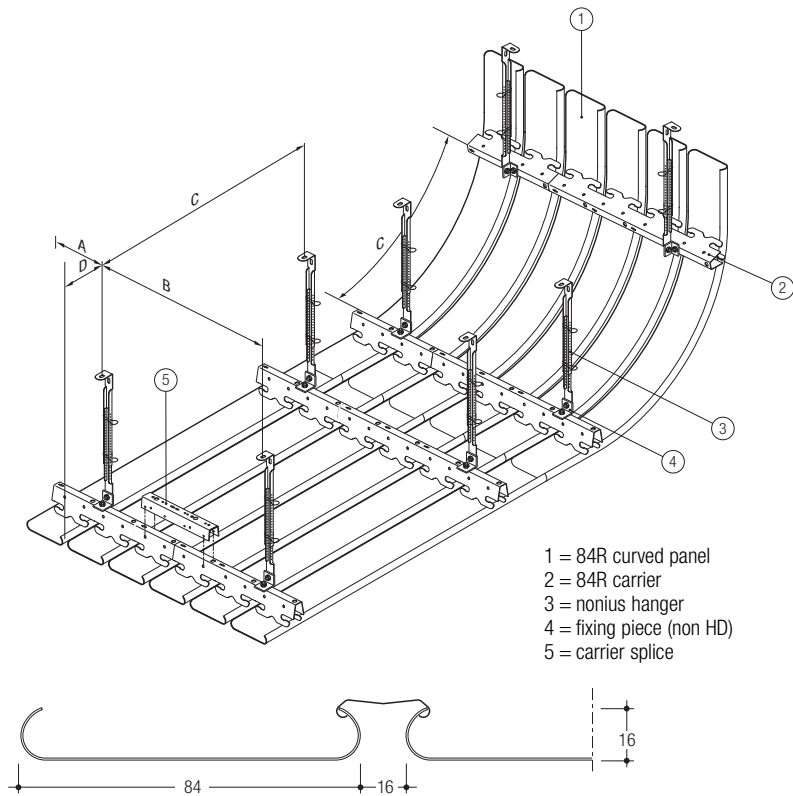

MAXIMUM SPANS

* Minus 200 mm in case of acoustic pads.

Panel type	Carrier span (mm)		Panel span (mm)			
	A	B	on 2 carriers		on 3 or more carriers	
84R	300	1700	C*	D	C*	D
			1500	150	1700	150

DIMENSIONS & WEIGHTS

* Based on panels installed on 3 or more carriers.

The panels are made to measure in any length from 800 mm up to 6000 mm.

Panels > 6000 mm available on request.

Panel	Width (mm)	Module (mm)	Min. length (mm)	Max. length (mm)	Weight panels & carriers/m ² *			
					Steel carrier		Alu carrier	
					Excl joins	Incl joins	Excl joins	Incl joins
84R	84	100	800	6000	1.8 kg	2.3 kg	1.7 kg	2.2 kg


MATERIAL REQUIREMENT PER M²

The required number of components depend on individual project requirements. Figures are based on maximum spans.


	Unit	Linear 84R system
Panels	lm	10
Join profiles	lm	10
Carriers	lm	0.59
Carrier splice	pc	0.12
Suspension	pc	0.35

FIXED AND VARIABLE



Curved panels help create concave, convex or undulating ceilings with a fixed radius of 325 mm, or a variable minimum radius of 1250 mm, achieving dramatic visual effects while also accommodating varying heights. Panel angles can vary between 0 degrees (flat panel) and 90 degrees.



Outside corner (fixed radius)







Inside corner (fixed radius)



84R Curved

AVAILABLE CURVED PANEL TYPES

Standard minimum radius for all curves approx.
1250 mm (exterior 1000 mm).

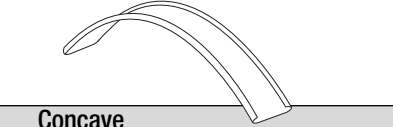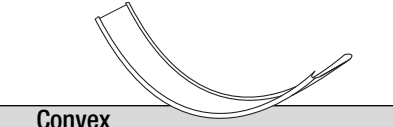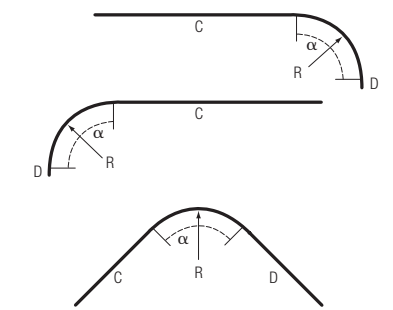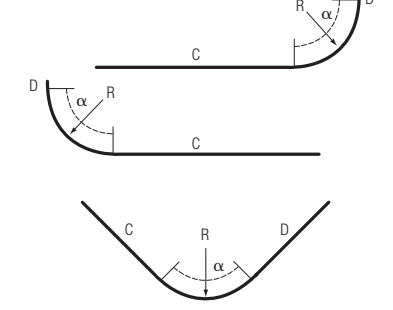Type of Curve	Concave	Convex
Continuous curve		
Curve + straight end(s) C + D		


APPEARANCE

- A linear, open ceiling surface using a concealed carrier suspension system allows the chosen panel curve to determine the appearance of the ceiling.
- The easy panel-on-carrier suspension system, the same as in the standard 84R ceilings, allows for easy transition to straight ceilings using the same panel.
- Long and narrow panel ceilings, length made to measure up to 6000 mm, allow swift installation (especially in larger areas) and reduce the needs for joints to a minimum.

I: Multiple panel curved ceilings:



II: Single panel curved ceilings:

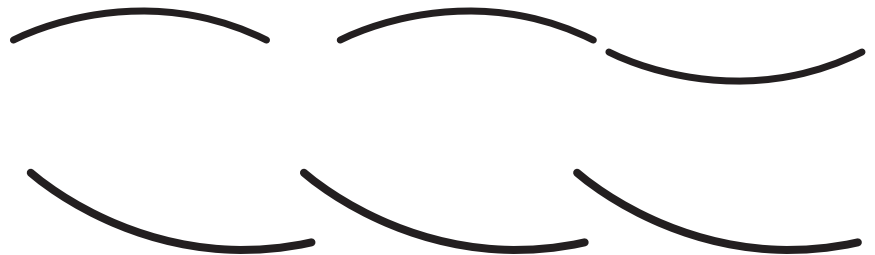

VALUES

* Curved panels feature straight ends of min.
130 mm.

Legend	Min/Max Values
L = Length of straight panel	Lmin = 1 mtr (std)
	Lmax = 6 mtr (std)
C/D = Length of straight ends	C/Dmin = 200 mm
R = Radius	Rmin = 1250 mm (interior)
	Rmin = 1000 mm (exterior)
α = Angle (alpha degrees)	αmax = 90°


Acoustics 84R Curved

ACOUSTIC PERFORMANCE


In order to improve interior sound control, Luxalon® 84R Ceiling panels can be perforated with a \varnothing of 1.0 or 2.0 mm (open area of 15% and 23%). A sound-absorbing non-woven tissue comes standard with perforated panels for enhanced acoustical performance. To further increase acoustic absorption, consider the ceiling radius: an increase in material surface quantity can result in up to 55% enhancement of absorption surface.

PERFORATION OPTIONS

84R panels are available in 2 standard perforation patterns:




Ø 1 mm
23% open area
2 3.46



Ø 2.0 mm
15% open area
5 mm


84R



Note: Panels have a plain border along their length to insure that the panel is flat and to enhance its strength.

Project : Bathydang, Keleti station, Astorid
Location : Budapest, Hungary
Product : Curved Ceiling 300C

SOUND ABSORPTION DATA 84R (straight panel)

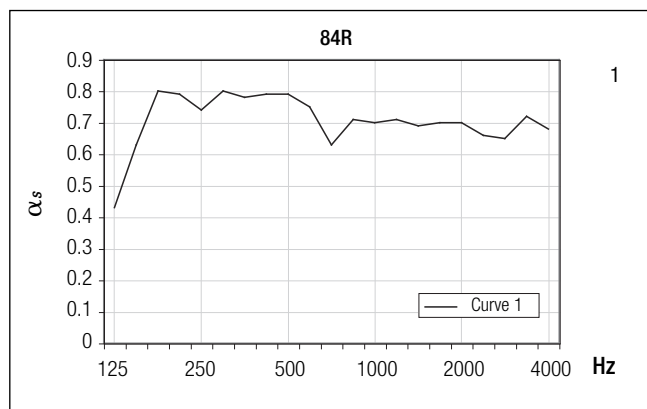

84R

α_s = sound absorption degree:
an absorption of 1.0 indicates a 100% absorption of sound.

- Curve 1 α_s 84R

84R panels with $\varnothing 2$ mm holes, module 100 mm, closed joints. The reverse side of the panels is provided with black non-woven tissue glued over the whole perforated area. Plenum depth is 200 mm.

Freq. Hz.	125	250	500	1000	2000	4000	α_w	NRC
Curve 1	0.43	0.74	0.79	0.70	0.70	0.68	0.75(L)	0.75

Tested by Peutz; test report no: A1709



Curved Carrier

PRINCIPLE


Consider a different and dramatic design - a curved ceiling with straight panels. This ceiling is possible when you use the Multi Panel system and the panel systems 84B, 84R, 70U and 300C.

BENEFITS

- A standard product and production process creates an extremely cost effective curved metal ceiling solution.
- Curved carriers support concave, convex or undulating ceilings, creating dramatic visual effects while accommodating varying heights.
- Long and narrow or Wide panel ceilings are made to measure up to 6000 mm, which allows for swift installation (especially in larger areas) and reduces the need for joints to a minimum.
- The same easy panel-on-carrier suspension system as used on standard ceilings, allowing easy transition to straight ceilings using the same panel.

1. PRINCIPLE SEGMENTED CARRIERS

Luxalon® Wide Panel ceiling 300C

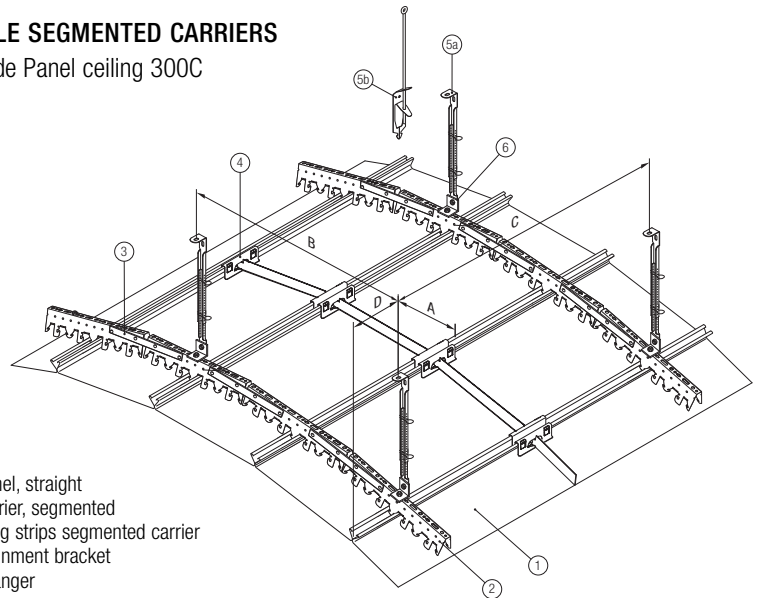


- 1 = 300C panel, straight
 2 = 300C carrier, segmented
 3 = connecting strips segmented carrier
 4 = 300C alignment bracket
 5a = nonius hanger
 5b = rod hanger
 6 = fixing piece (non HD)

	Min. radius concave (m)	Min. radius convex (m)
Segmented carrier	2	5

2. PRINCIPLE FLEXIBLE CARRIERS

Luxalon® Linear ceiling system 84B, 84R, 70U and Multi panel

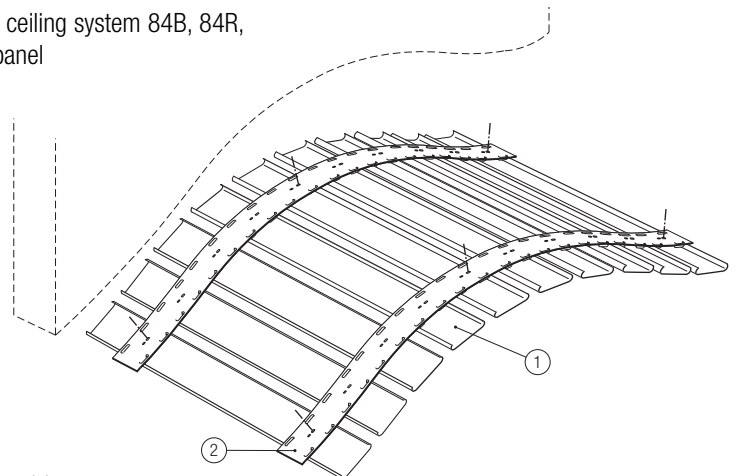

- 1 = ceiling panel, straight
 2 = flex carrier

	Type of ceiling	Minimum radius profiles	Flat recessed join profile	V-20 join profile
		Min. radius (mm)	Min. radius (mm)	Min. radius (mm)
Convex	80B	300	450	300
	130B	1,200	1,200	1,200
	180B	600	600	600
	84B	600	Not applicable	Not applicable
	70U	600	Not applicable	Not applicable
Concave	80B	400	600	600
	130B	600	2,000	600
	180B	1,200	5,000	1,200
	84B	400	Not applicable	Not applicable
	70U	200	Not applicable	Not applicable

Material specifications

- Proven Fire Protection

Luxalon® metal suspended ceilings are classified incombustible and will therefore not contribute to possible fires. When ceilings need to protect the structural integrity of the building, Luxalon® ceilings offer a range of practical and tested solutions with regards to fire resistance and fire stability.



- ENVIRONMENT

Hunter Douglas is dedicated to manufacturing sustainable products. Our paint and aluminium melting processes are considered industry standards in terms of clean production processes. All of our aluminium products are 100% recyclable at the end of their lifecycle.

*Right : Railway station Berchem
Location : Antwerpen, Belgium
Product : Curved ceiling 84R Exterior*

Unprecedented Protection
LUXACOTE®
for exterior application

- EXTERIOR USE

Luxalon® Curved ceilings are ideal for outdoor applications. Our proprietary coil-coating process ensures a strong finish - the Luxacote® system. Luxacote® contains a solid UV filter that guarantees colour-fastness and gloss stability as well as optimal resistance against corrosion, abrasions and scratches.

- Colour range

The standard Hunter Douglas interior and exterior colour range for Luxalon® Ceiling systems includes a wide variety of colours and finishes. See the Luxalon® colour chart for all available options. All RAL and NCS colours are also available on request.

- Tolerances

As a member of the Technical Association of Industrial Metal Ceiling Manufacturers (TAIM), Hunter Douglas complies with tolerance criteria as specified in chapter 4 of the TAIM Quality standards for metal.

CURVED CEILING POSSIBILITIES

Curved panels: 84R, 300C

Segmented carriers: 300C

Flexible carriers: Multipanel, 84B, 84R, 70U

LUXALON® EXTERIOR CEILINGS



Luxalon® Exterior ceilings are developed to withstand all weather influences including intensive sunshine, dramatic temperature changes, moisture, pollution, and strong wind loads. Their durability comes from our special aluminium alloy, and the patented Luxacote® system. Luxalon® Exterior ceilings are ideal for use in canopies, shopping centres and railway/underground stations.

- Special alloy of corrosion-resistant aluminium
- Luxacote® coating system resistant to UV, scratches and vandalism and is rain-, dirt- and snow-proof
- Certified for wind loads

Impressions

CURVED PANELS

Right : Nanji airport

Location : Nanji, Japan

Product : Curved ceiling 300C

Below : Metro Valencia Estacion Santa Rosa

Location : Valencia, Venezuela

Product : Curved ceiling 300C



CURVED CARRIERS

Right : O.L.V. van Lourdes College

Location : Edegem, Belgium

Product : Linear ceilings 70U

Below : Underground Station

Location : Rotterdam, the Netherlands

Product : Wide Panel ceiling 300C



HUNTER DOUGLAS ARCHITECTURAL PRODUCTS

In the last 50 years, we've been fortunate enough to help turn countless innovative sketches into innovative buildings.



Architects, designers, investors and contractors from around the world have taken advantage of Hunter Douglas' unmatched product development, service and support. Chances are, you've seen more of Hunter Douglas than you think.

With major operation centres in Europe, North America, Latin America, Asia and Australia, we've contributed to thousands of high-profile projects, from retail and commercial facilities to major transit centres and government buildings.

Not only are the world's architects and designers our partners, they're our inspiration. They continue to raise the bar for excellence. We create products that help bring their visions to life: Window Coverings, Ceilings, Sun Control Systems and Façades.



Promoting sustainable
forest management
www.pefc.org



Hunter Douglas products and solutions are designed to improve indoor environmental quality and conserve energy, supporting built environments that are comfortable, healthy, productive, and sustainable.



Our paint and aluminium melting processes are considered to be one of the industry standards in terms of clean production processes. All aluminium products are 100% recyclable at the end of their lifecycle.

ARCHITECTURAL SERVICES

We support our business partners with a wide range of technical consulting and support services for architects, developers and installers. We assist architects and developers with recommendations regarding materials, shapes and dimensions and colours and finishes. We also help creating design proposals, visualisations and mounting drawings. Our services to installers range from providing detailed installation drawings and instructions to training installers and advising on the building site.



HunterDouglas

CEILING



HUNTER DOUGLAS is a publicly traded company with activities in more than 100 countries with over 150 companies.

The origin of our company goes back to 1919, in Düsseldorf, Germany. Throughout our history, we have introduced innovations that have shaped the industry, from the invention of the continuous aluminium caster, to the creation of the first aluminium Venetian Blinds, to the development of the latest high-quality building products.

Today we employ more than 16,500 people in our companies with major operation centres in Europe, North America, Latin America, Asia and Australia.

Innovative Products Make Innovative Projects


© Registered trademark - a HunterDouglas® product Pats. & Pats. Pend. - Technical data subject to change without notice. © Copyright Hunter Douglas 2014. No rights can be derived from copy, text pertaining to illustrations or samples. Subject to changes in materials, parts, compositions, designs, versions, colours etc., even without notice. MX200C00

Learn More


■ Contact our Sales office

■ www.hunterdouglascontract.com

Wide Panel



Linear




Screen




Tiles
XL panel



Cell
Stretch metal



Curved



Exterior



Belgium
Bulgaria
Croatia / Slovenia
Czechia
Denmark
France
Germany
Greece
Hungary
Italy
The Netherlands
Norway
Poland
Portugal
Romania
Russia
Serbia
Slovakia
Spain
Sweden
Switzerland
Turkey
United Kingdom
Africa
Middle East

Asia
Australia
Latin America
North America

HUNTER DOUGLAS
ARCHITECTURAL PROJECTS UK
Pondwood House, Pondwood Close
Moulton Park, Northampton NN3 6RT
United Kingdom
Tel.: +44 (0)1604 766251
info@hunterdouglas.co.uk
www.hunterdouglas.co.uk

HunterDouglas

WINDOW COVERINGS

CEILING

SUN CONTROL

FAÇADES