



Report No. 392-2013-00068702

Eurofins Product Testing A/S Smedeskovvej 38 8464 Galten Denmark

voc@eurofins.com www.eurofins.com/voc-testing

Date 15 November 2013

Hunter Douglas Europe BV Piekstraat 2 3071 EL Rotterdam NETHERLANDS


VOC Emissions Test report

1. Sample Information

| Sample identification | HD0280 perforated + non-woven |
|-------------------------------|-------------------------------|
| Product type | Ceiling panel |
| Batch no. | - |
| Production date | - |
| Date when sample was received | 08/10/2013 |
| Testing (start - end) | 11/10/2013 - 08/11/2013 |

2. Resulting VOC Emissions Class Label

This recommendation is based on French regulation of March 23, 2011 (décret DEVL1101903D) and of April 19, 2011 (arrêté DEVL1104875A). For details please see www.eurofins.com/france-voc

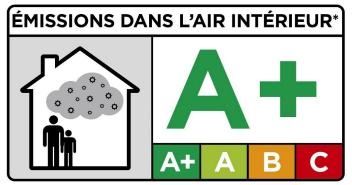

Information sur le niveau d'émission de substances volatiles dans l'air intérieur, présentant un risque de toxicité par inhalation, sur une échelle de classe allant de A+ (très faibles émissions) à C (fortes émissions).

The product was assigned a VOC emission class without taking into account the measurement uncertainty associated with the result. As specified in French Decree no. 2011-321 of March 23, 2011, correct assignment of the VOC emission class is the sole responsibility of the party responsible for distribution of the product in the French market.



3. Test Method

| Method | | Principle | Parar | neter | Quantification limit | Uncer | tainty | | | | |
|--|-----|---|-------------------------|-------|-------------------------|-----------------------|--------|--|--|--|--|
| ISO 16000 parts -3, -6, -9, -11 | | GC/MS | VOC | | 2 µg/m³ | 22% (RSD) | | | | | |
| Internal method numbers: 9810, 9811, 9812, 2808, 8400 | | HPLC/UV | Volatile alde- hydes | | 3 µg/m³ | Um = 2 x RSD= 45 % | | | | | |
| Test chamber parameter | | | | | | | | | | | |
| Chamber volume, I | 119 | Temperature, °C | | 23±1 | Relative humidity, % 5 | | 50±5 | | | | |
| Air change rate, 1/h | 0.5 | Loading ratio, m ² /m ³ | | 0.4 | | | | | | | |
| Test condition: Sample stayed in test chamber during the whole 28 days testing period. | | | | | | | | | | | |
| Sample preparation | | | | | | | | | | | |
| A piece was cut out and placed into the chamber. | | | | | | | | | | | |





4. Results

| | Concentration after 28 days µg/m³ | С | В | A | A+ |
|----------------------------|---|-------|-------|-------|-------|
| TVOC | < 2 | >2000 | <2000 | <1500 | <1000 |
| Formaldehyde | 3.3 | >120 | <120 | <60 | <10 |
| Acetaldehyde | <3 | >400 | <400 | <300 | <200 |
| Toluene | <2 | >600 | <600 | <450 | <300 |
| Tetrachloroethylene | <2 | >500 | <500 | <350 | <250 |
| Ethylbenzene | <2 | >1500 | <1500 | <1000 | <750 |
| Xylene | <2 | >400 | <400 | <300 | <200 |
| Styrene | <2 | >500 | <500 | <350 | <250 |
| 2-Butoxyethanol | <2 | >2000 | <2000 | <1500 | <1000 |
| 1,2,4- Trimethylbenzene | <2 | >2000 | <2000 | <1500 | <1000 |
| 1,4-Dichlorobenzene | | >120 | <120 | <90 | <60 |

< Means less than

> Means higher than

Ar Von

Dr. Arja Valtanen Analytical Service Manager