



Decorative Bi-Colour Vinyl Screen

3 Openness Factors


Openness Factor 1% - 3% - 7% 

Semi-Transparent / Transparent 


34% Glass + 66% PVC 








FR Rating B1 - M1 

Max. Dimensions without Joint (mm)

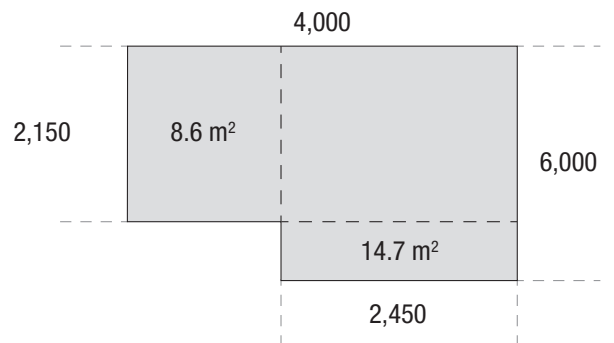



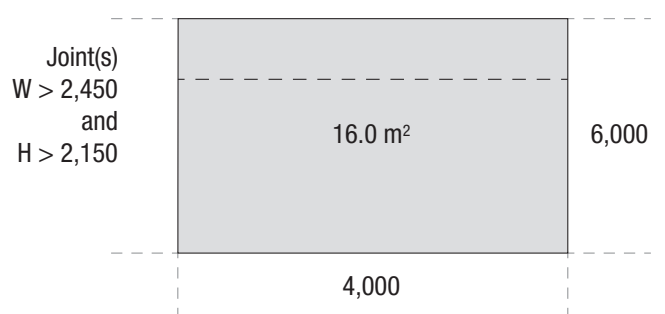

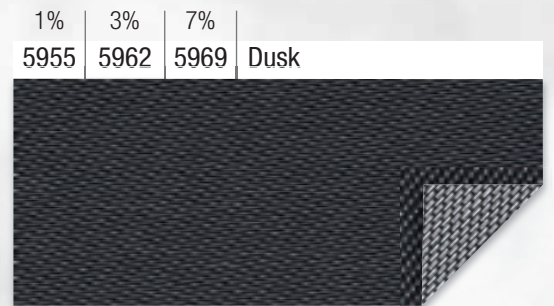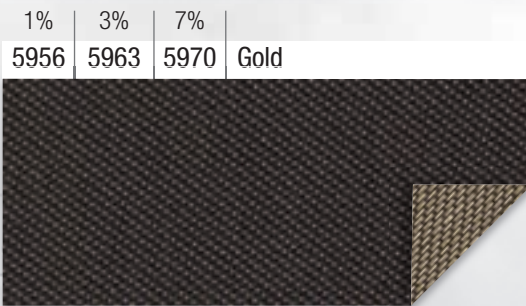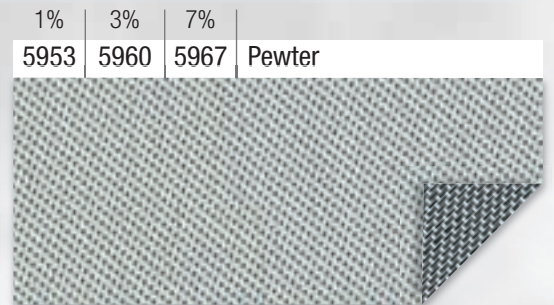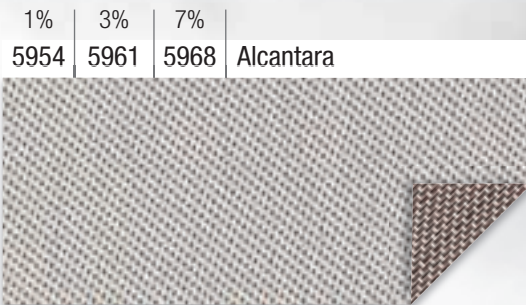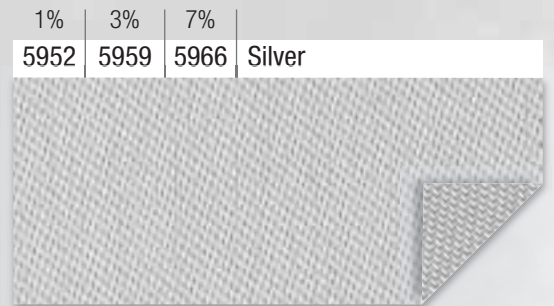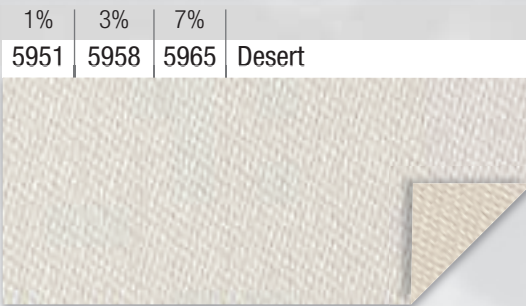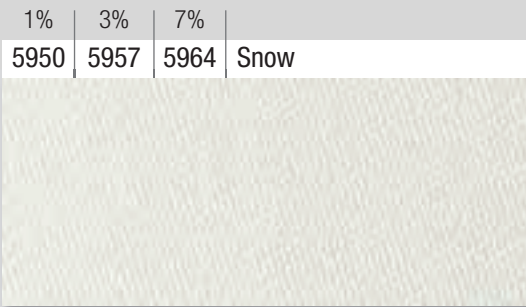



Max. Dimensions with Joint (mm)











Material Properties

-  **Openness Factor**
1% - 3% - 7%
-  **Transparency**
Semi-Transparent / Transparent
-  **Material Composition**
34% Glass + 66% PVC
-  **Weight**
463 g/m² - 420 g/m² - 395 g/m²
-  **Thickness**
0.60 mm
-  **Fabric Width**
2,500 mm
-  **Colour Fastness**
White >5, other 7-8 • ISO 105 B02
-  **Cleaning**
Sponge




Max. Sizes Roller Blinds

-  **Direction A without joint (8.6 m²)**
4,000 mm (W) x 2,150 mm (H)
-  **Direction A with joint (16 m²)**
4,000 mm (W) x 6,000 mm (H)
-  **Direction B without joint (14.7 m²)**
2,450 mm (W) x 6,000 mm (H)











Fire Resistance Rating

-  **DIN 4102 B1**
NF P-92503 M1

Environment (for interior use)

-  **Low VOC**
-  **Suitable for Humid Environments**
-  ***Suitable for computer work according to 90/270/EEC**

Fenestration Properties

LPN Code	Fabric Side	Light Values					Energy Values				
		EN410 / EN14501					EN410		ISO 15099		
											
Rv %	Tvdiff %	Tvdir %	Glc	Tuv %	Rs %	Ts %	gB %	gC %	gD %		
5950*	F	77	17	1	1	1	68	19	34	37	16
5950*	B	77	17	1	1	1	69	19	34	37	16
5951*	F	65	15	2	1	2	60	19	40	42	20
5951*	B	72	15	2	1	2	64	19	37	39	18
5952*	F	53	13	1	1	2	48	15	46	46	22
5952*	B	67	13	1	1	2	60	15	39	41	19
5953*	F	27	6	1	1	2	24	7	57	54	28
5953*	B	57	6	1	1	2	50	7	43	44	21
5954*	F	28	6	1	1	2	26	8	56	53	28
5954*	B	57	6	1	1	2	51	8	43	44	21
5955*	F	37	1	1	3	1	32	2	52	50	26
5955*	B	13	1	1	3	1	11	2	63	57	31
5956*	F	24	1	1	3	1	22	2	58	54	28
5956*	B	10	1	1	3	1	9	2	64	58	31
5957	F	72	19	5	1	6	64	23	38	40	18
5957	B	72	19	5	1	6	64	23	38	40	18
5958*	F	67	15	5	0	6	61	22	40	41	19
5958*	B	61	15	5	0	6	56	22	42	43	21
5959*	F	65	10	4	1	5	58	16	40	42	19
5959*	B	53	10	4	1	5	49	16	45	46	22
5960*	F	56	6	3	1	4	48	10	45	45	22
5960*	B	30	6	3	1	4	26	10	56	53	27
5961*	F	53	9	4	1	5	47	13	46	46	22
5961*	B	30	9	4	1	5	28	13	56	53	27
5962*	F	10	2	4	3	5	9	6	65	58	31
5962*	B	28	2	4	3	5	25	6	57	53	28
5963*	F	9	1	4	3	4	8	5	65	59	31
5963*	B	22	1	4	3	4	20	5	59	55	29
5964	F	71	20	5	1	6	64	25	38	40	18
5964	B	71	20	5	1	6	63	25	38	40	18
5965	F	63	19	6	0	7	57	25	42	43	20
5965	B	67	19	6	0	7	60	25	40	41	19
5966	F	55	16	5	0	6	50	23	46	45	22
5966	B	64	16	5	0	6	57	23	42	42	20
5967*	F	36	11	5	0	6	32	17	54	51	26
5967*	B	57	11	5	0	6	50	17	45	45	21
5968*	F	37	11	5	1	6	34	17	53	51	26
5968*	B	57	11	5	1	6	51	17	44	44	21
5969*	F	25	2	6	1	7	22	8	58	54	28
5969*	B	10	2	6	1	7	9	8	65	58	31
5970*	F	18	2	6	1	7	16	8	61	56	30
5970*	B	8	2	6	1	7	7	8	66	59	32

© Registered trademark - a HunterDouglas® product Pats. & Pats. Pend. - Technical data subject to change without notice.
© Copyright Hunter Douglas 2012. No rights can be derived from copy, text pertaining to illustrations or samples.
Subject to changes in materials, parts, compositions, designs, versions, colours etc., even without notice.