

Wide Plain Black-Out Fabric
White Backing


Openness Factor 0% 

Black-Out 


100% Polyester 





FR Rating B1 - M1 

Max. Dimensions without Joint (mm)

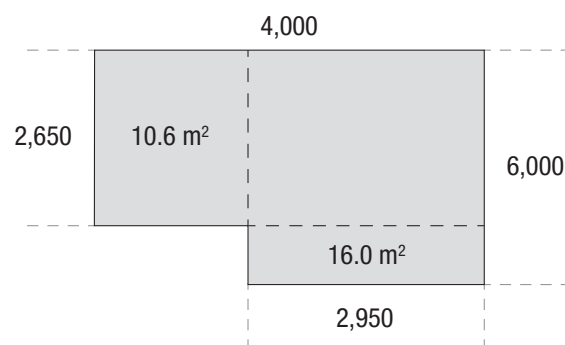

Max. Dimensions with Joint (mm)

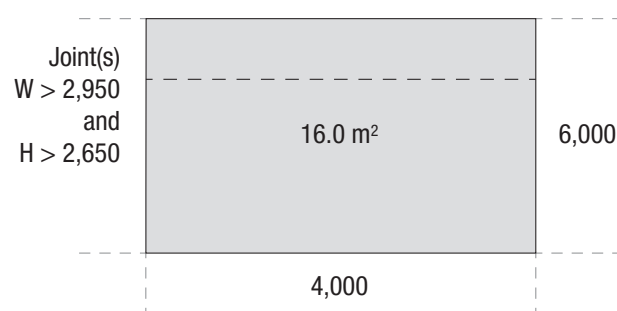

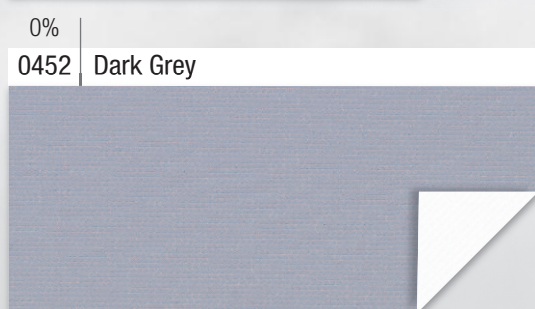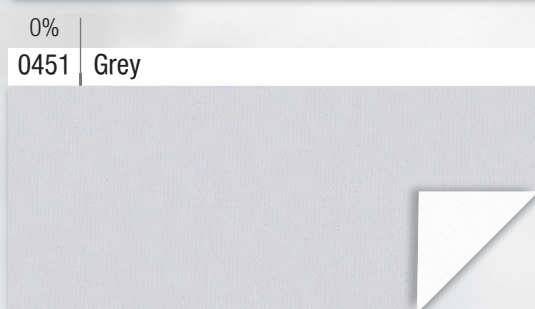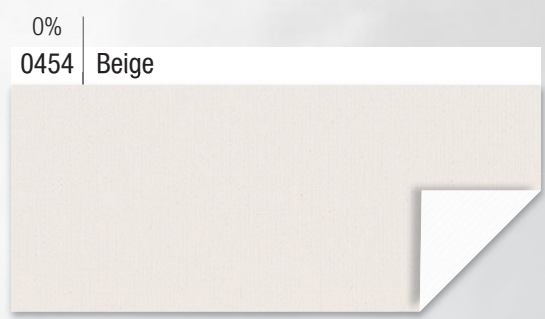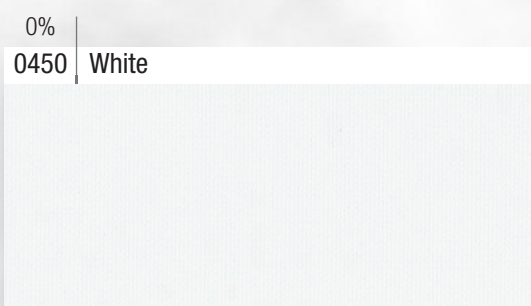

Material Properties

	Openness Factor 0%
	Transparency Black-Out
	Material Composition 100% Polyester
	Weight 300 g/m²
	Thickness 0.38 mm
	Fabric Width 3,000 mm
	Colour Fastness 6-7 • ISO 105 B02
	Cleaning Sponge

Max. Sizes Roller Blinds

	Direction A without joint (10.6 m ²) 4,000 mm (W) x 2,650 mm (H)
	Direction A with joint (16 m ²) 4,000 mm (W) x 6,000 mm (H)
	Direction B without joint (16 m ²) 2,950 mm (W) x 6,000 mm (H)

Fire Resistance Rating

	DIN 4102 B1 NF P-92503 M1
---	--

Environment (for interior use)

	Low VOC PVC Free
	Suitable for Humid Environments

Fenestration Properties

		Light Values					Energy Values				
		EN410 / EN14501					EN410	ISO 15099			
LPN Code	Fabric Side										
		Rv %	Tv _{diff} %	Tv _{dir} %	Glc	Tuv %	Rs %	Ts %	gB %	gC %	gD %
0450*	F	83	0	0	4	0	72	0	30	35	14
0451*	F	82	0	0	4	0	72	0	30	35	14
0452*	F	82	0	0	4	0	71	0	30	35	14
0454*	F	83	0	0	4	0	72	0	30	35	14



**Suitable for computer work according to 90/270/EEC*